

UGR<16




Specifications


Product model	BL-TL80W-01A
Input power	80W
Light output	10,000 lm
Efficacy	125 lm/W
LED lamp	2835
CCT	3000K, 4000K, 5000K, 6000K
CRI	80
Beam angle	86
Optical cover	PC lens
UGR	<16
LED driver	Meanwell
Input voltage	100-277V AC, 50/60Hz
Functions	0-10V, DALI, Emergency, Occupancy sensing
IP Rating	IP20
Lifetime	50,000 hrs

Dimensions (mm)

80W (595*1195)

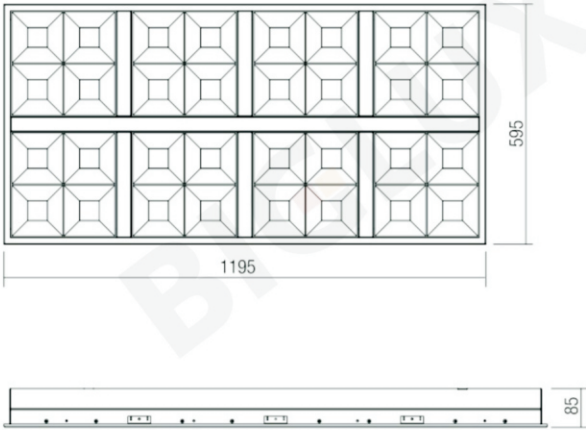

Photometrics

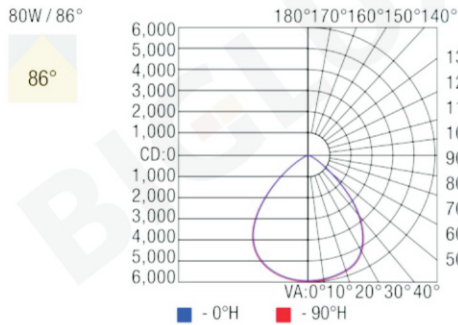

	Center Beam lux	Beam Width
2m	1,494.25 lux	3.3m 3.4m
4m	373.56 lux	6.7m 6.8m
6m	166.03 lux	10.0m 10.3m
8m	93.39 lux	13.3m 13.7m
10m	59.77 lux	16.6m 17.1m
12m	41.51 lux	20.0m 20.5m

■ Vertical: 79.5° ■ Horizontal: 81.0°

LED Aging test

